

32 SERIES OPERATING INSTRUCTIONS

Operating Instructions:

1. Insert connector onto test piece. Make sure a minimum of .750 (3/4") of engagement is achieved. This will ensure proper seal life and gripping ability.



2. Cam the handle 90° from the charge port.



3. Test media can be introduced thru the 1/4" NPT charge port.



4. After your test is completed vent the system then remove the connector.

Adjustment:


1. If the RAMSEAL® connector is not sealing properly some adjustment may be needed.
2. The head and body are set using Loctite® from the factory. Uses a 1-5/8" wrench to break the Loctite® loose.
3. Clockwise to tighten.



4. Counterclockwise to loosen.



Replacement Parts and Assembly Diagrams:

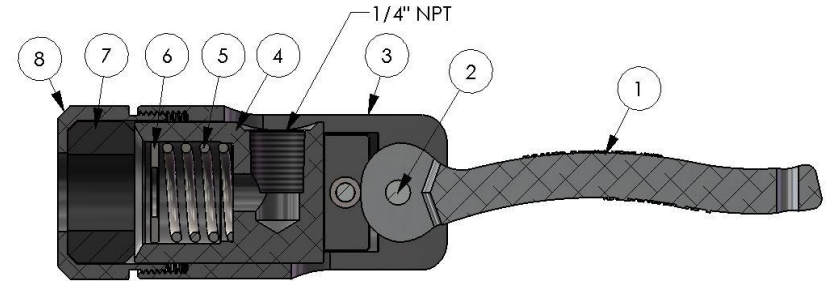

ITEM NO.	PART NO.	DESCRIPTION
1	3202	Handle
2	3203	Handle Pin
3	3201	Body
4	3204	Insert
5	3207	Spring
6	3212	Tube Stop (-11 to -14 Only)
7	3208-*	Seal
8	3205-*	Head

* Specify Model Number, and /or Tube I.D. and O.D.