

40X SERIES OPERATING INSTRUCTIONS

Operating Instructions:

1. Insert connector onto test piece. Make sure a minimum of .875 (7/8") of engagement is achieved. This will ensure proper seal life and gripping ability.



2. Cam the handle 90° from the charge port.




3. Introduced test media through the 1/8" NPT charge port.



4. After your test is completed, vent the system then remove the connector.

Replacement Parts and Assembly Diagram:

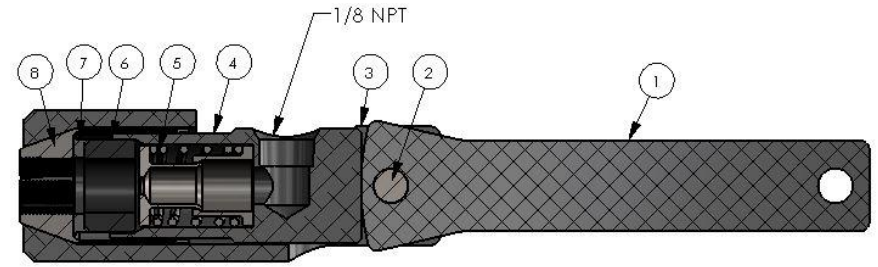

ITEM NO.	PART NO.	DESCRIPTION
1	4002X	Handle
2	4003X	Handle Pin
3	4001X	Body
4	4004X	Insert
5	4007XASM*	Spring Assembly
6	4008X-*	Seal
7	4014X-*	Washer
8	4006X-*	Collet

* Specify Model Number, and /or Tube I.D. and O.D.