

# 52 SERIES OPERATING INSTRUCTIONS

## Operating Instructions:

1. Insert connector onto test piece. Make sure a minimum of .550 of engagement is achieved. This will ensure proper seal life and gripping ability.



2. Cam the handle 90° from the charge port.



3. Test media can be introduced thru the 1/4" NPT charge port.



4. After your test is completed vent the system then remove the connector.

## Adjustment:


1. If the RAMSEAL® connector is not sealing properly some adjustment may be needed.
2. Clockwise to tighten



3. Counterclockwise to loosen



## Replacement Parts and Assembly Diagram:

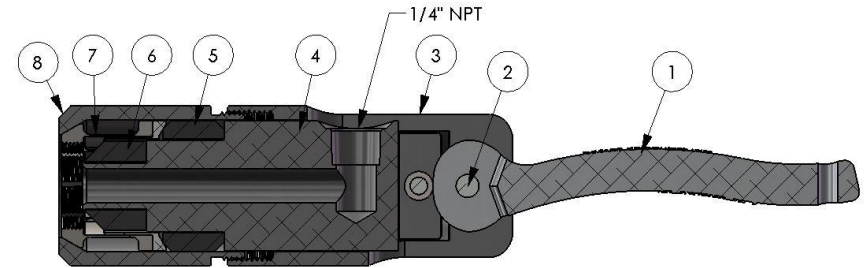

ITEM NO.	PART NO.	DESCRIPTION
1	5202	Handle
2	5203	Handle Pin
3	5201	Body
4	5204	Insert
5	5208	Seal
6	5214	Plug Seal
7	5206-*	Collet
8	5205	Head

\* Specify Model Number, and /or Tube I.D. and O.D.